

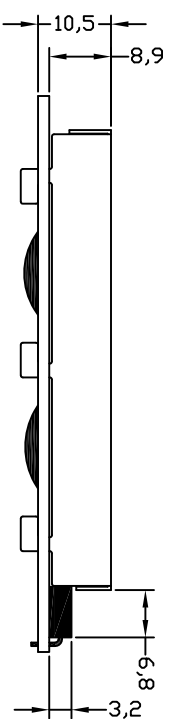


VERSION	CHANGE CONTENT	DATE

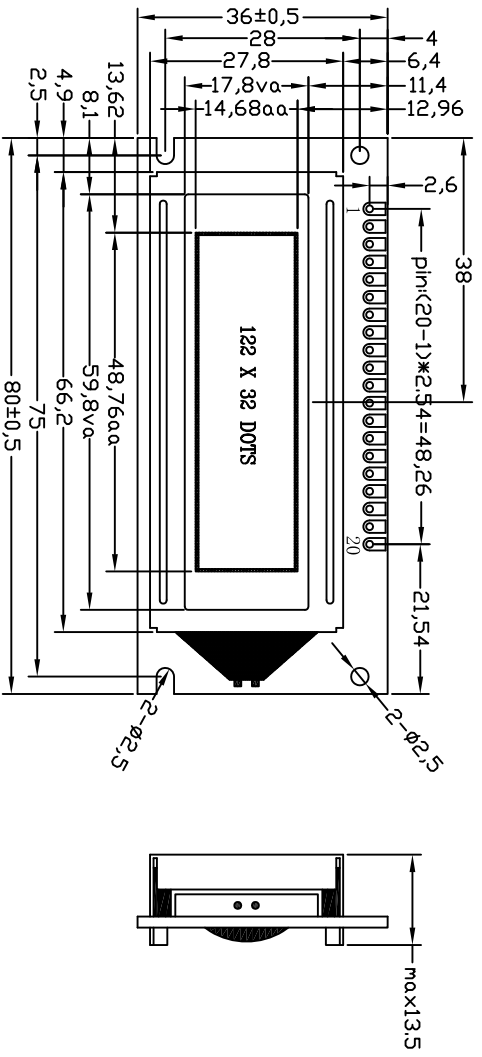


PCB ASSIGNMENT:

1	VSS	12	DB2
2	VDD	13	DB3
3	V0	14	DB4
4	A0	15	DB5
5	CS1	16	DB6
6	CS2	17	DB7
7	CL/NV	18	RES
8	E/NC	19	A/VEE
9	R/W	20	K
10	DB0	21	
11	DB1	22	

SPECIFICATIONS

1. DISPLAY TYPE: STN or TFTN
2. DISPLAY RESOLUTION: 122x32
3. LCD DRIVING VOLTAGE: 5.0V
4. LOGIC VOLTAGE: 5.0V
5. VIBRING DIRECTION: 6 O'CLOCK
6. OPERATING TEMP: -20 ° C ~ 70 ° C.
7. STORAGE TEMP: -30 ° C ~ 80 ° C.
8. LCD CONTROLLER DRIVE: SBI520 (OR EQUIVALENT)
9. DRIVE MODE: 1/32 DUTY, 1/8 BIAS
10. BACKLIGHT: SIDE (VOLTAGE: 3.0V ELECTRICITY: 15ma) or BOTTOM (VOLTAGE: 4.2V ELECTRICITY: 200ma) LED BACKLIGHT
11. REBAR: Controller built-in European-English Font

DOTS SIZE  
SCALE: 10:1

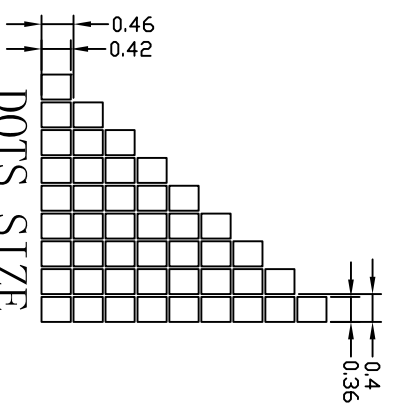

DESCRIPTION:

SCALE: 1:1

SHEET: 1 OF 1

ThingWell Electronics

PROJECTION

LCM NUMBER

W12232B

UNIT: mm

DRAWING VERSION

V01

APP:

CHK:

DWN:

DATE:

DATE:

DATE:

MECHANICAL TOLERANCE: X.X ±0.3 X.XV ±0.2