
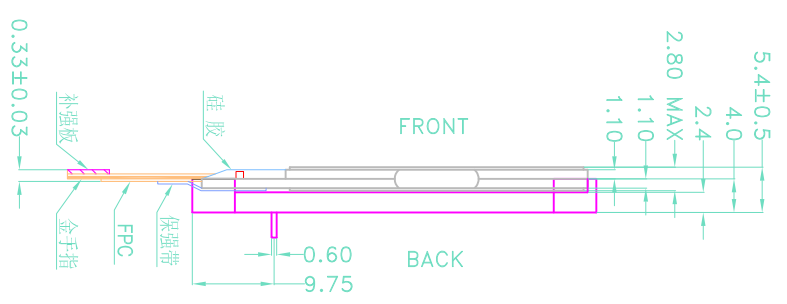


VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.13

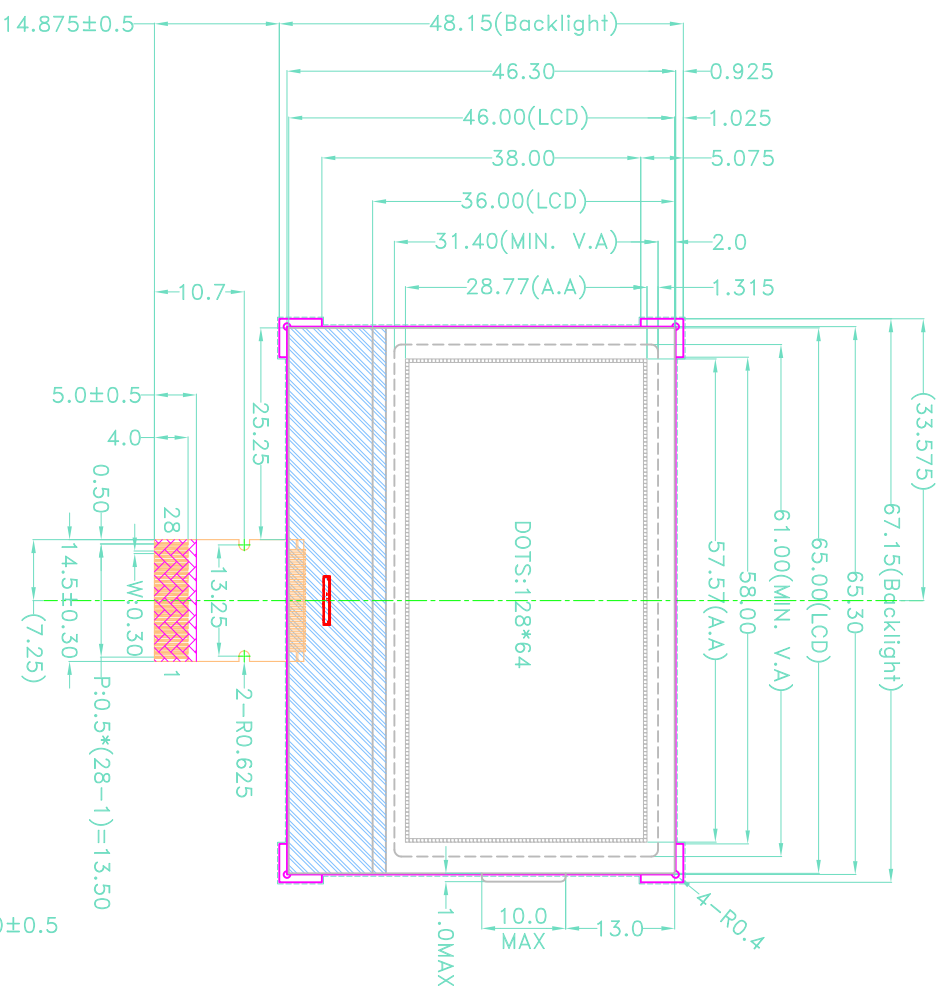


FPC PIN ASSIGNMENT:

1	/CS	15	VSS
2	RESET	16	VOUT
3	RS	17	CAP4+
4	R/W	18	CAP3+
5	E	19	CAP1-
6	DB0	20	CAP1+
7	DB1	21	CAP2+
8	DB2	22	CAP2-
9	DB3	23	V1
10	DB4	24	V2
11	DB5	25	V3
12	DB6	26	V4
13	DB7	27	V0
14	VDD	28	PS

SPECIFICATIONS

1. DISPLAY TYPE:STN V/G/STN BLUE/STN Positive/Negative
2. DISPLAY RESOLUTION:128*64
3. LCD DRIVING VOLTAGE: 8.5V
4. LOGIC VOLTAGE: 3.0 V
5. VIEWING DIRECTION: 6 O'CLOCK
6. OPERATING TEMP:0°C -- +50°C
7. STORAGE TEMP:-10°C -- +60°C
8. LCD CONTROLLER/DRIVE: NT7538 (Or Compatible)
9. DRIVE MODE:1/65 DUTY,1/9 BIAS
10. BACKLIGHT: SIDE LED BACKLIGHT
11. REMARK:



DESCRIPTION:		ThingWell Electronics	
SCALE: 1:1			
SHEET: 1 OF 1			
UNIT: mm	PROJECTION	LCM NUMBER	W12864G
APP:		DRAWING VERSION	V01
DATE:		CHK:	DWN:
		DATE:	DATE:

MECHAICAL TOLERANCE:x±0.3,x.xx±0.2