
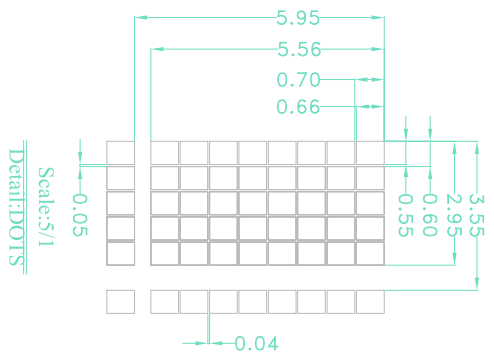
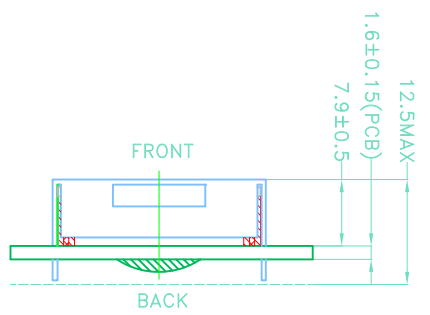


VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.10

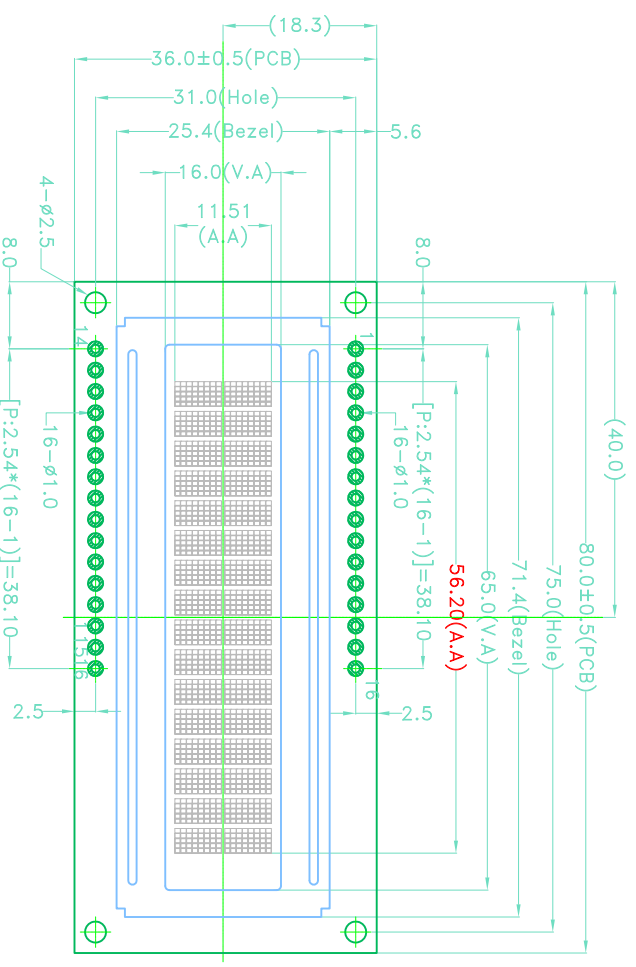

**SPECIFICATIONS**

1. DISPLAY TYPE:STN Y/G/STN BL/UE/ESTN Positive/Negative
2. DISPLAY RESOLUTION: 16\*02 CHARACTER
3. LCD DRIVING VOLTAGE:4.5V
4. LOGIC VOLTAGE:5.0 V
5. VIEWING DIRECTION:6 O'CLOCK
6. OPERATING TEMP:-10°C -- +50°C
7. STORAGE TEMP:-10°C -- +60°C
8. LCD CONTROLLER/DRIVE:ST7066 (Or Compatible)
9. DRIVE MODE:1/16 DUTY, 1/5 BIAS
10. BACKLIGHT:SIDE LED BACKLIGHT
11. REMARK:

**PCB PIN ASSIGNMENT:**

1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	LED+
8	DB1	16	LED-

**DESCRIPTION:**

SCALE: 1:1  
SHEET: 1 OF 1

ThingWell Electronics

UNIT:	PROJECTION	LCD NUMBER	DRAWING VERSION	DATE:
mm		W1602C	V01	
APP:		CHK:	DWN:	DATE:
DATE:		DATE:		

MECHANICAL TOLERANCE:X.X±0.3,X.XX±0.2