
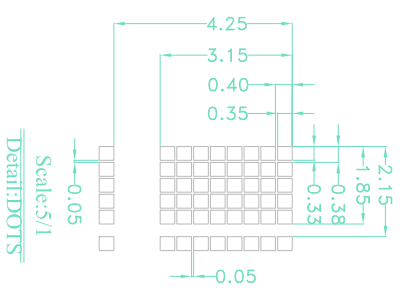



VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.10

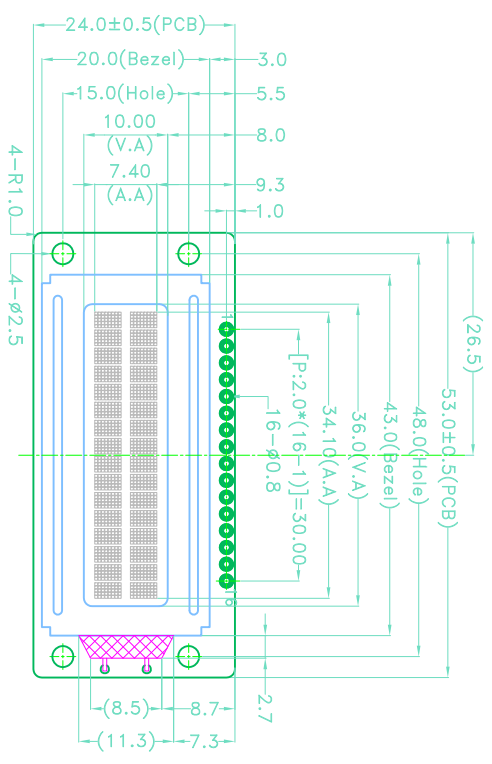

PCB PIN ASSIGNMENT:

1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	BLA
8	DB1	16	BLK

**SPECIFICATIONS**

1. DISPLAY TYPE:STN Y/G/STN BLUE /STN Positive/Negative
  2. DISPLAY RESOLUTION: 16\*02 CHARACTER
  3. LCD DRIVING VOLTAGE:4.8V
  4. LOGIC VOLTAGE:5.0V±0.5V
  5. VIEWING DIRECTION:6 O'CLOCK
  6. OPERATING TEMP:0°C -- +50°C
  7. STORAGE TEMP:-10°C -- +60°C
  8. LCD CONTROLLER / DRIVE: ST7066 (Or Compatible)
  9. DRIVE MODE:1/16 DUTY, 1/5 BIAS
  10. BACKLIGHT:SIDE LED BACKLIGHT
  11. REMARK:
- MECHAICAL TOLERANCE:x.±0.3,x.xx±0.2

**DESCRIPTION:**

SCALE: 1:1	ThingWell Electronics	
SHEET: 1 OF 1		
PROJECTION	LCM NUMBER	W1602E
UNIT: mm		V01
APP:	CHK:	DWN:
DATE:	DATE:	DATE: