


VERSION	CHANGE CONTENT	DATE

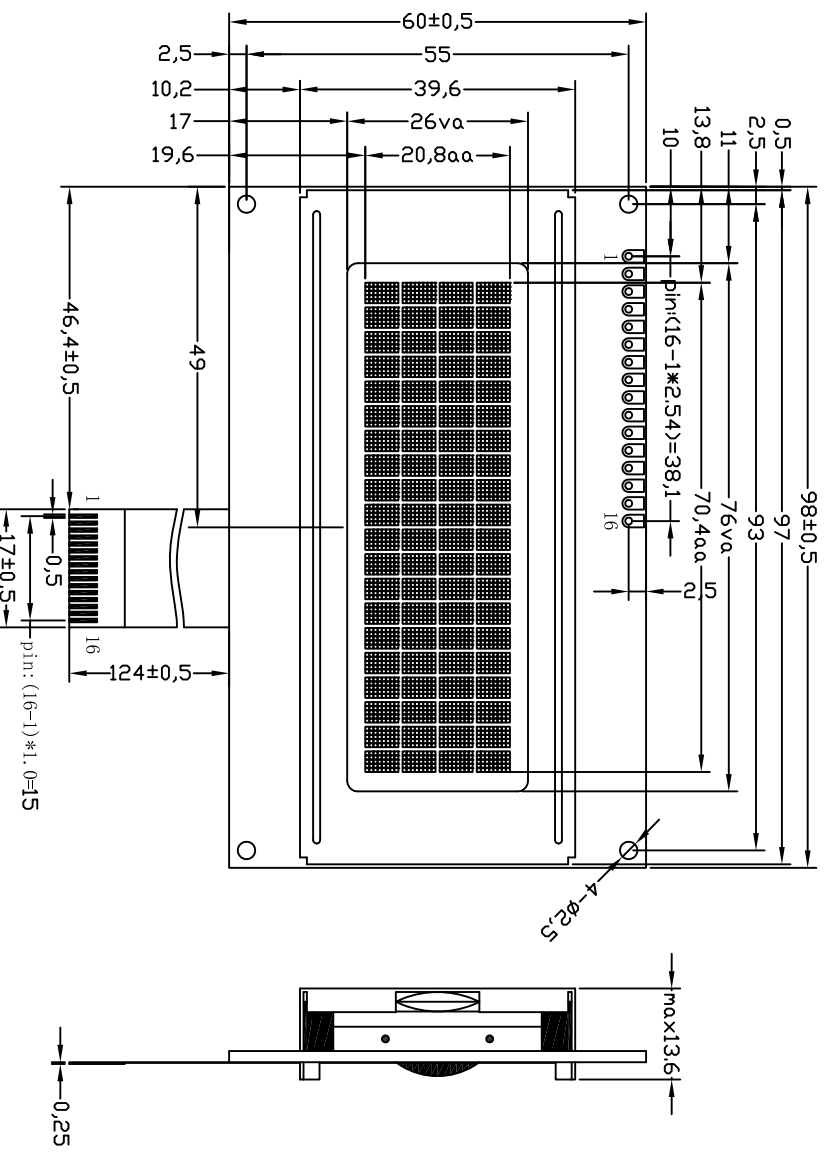


PCB ASSIGNMENT:

1	VSS	12	DB5
2	VDD	13	DB6
3	V0	14	DB7
4	RS	15	A
5	R/W	16	K
6	E	17	/
7	DB0	18	/
8	DB1	19	/
9	DB2	20	/
10	DB3	21	/
11	DB4	22	/

SPECIFICATIONS

1. DISPLAY THRESHOLD
2. DISPLAY RESOLUTION: 200*4
3. LCD DRIVING VOLTAGE: 4.5V
4. LOGIC VOLTAGE: 5.0V
5. VIEWING DIRECTION: 6 O'CLOCK
6. OPERATING TEMP: -20 ° C ~ 70 ° C.
7. STORAGE TEMP: -30 ° C ~ 80 ° C.
8. LCD CONTROLLER/DRIVER: SH1C7800 (TPCS)*SH1C100 (TPCS) (OR EQUIVALENT)
9. DRIVE MODE: 1/16 DUTY, 1/5 BIAS
10. BACKLIGHT: SIDE VOLTAGE: 3.0V ELECTRICITY: 45mA
11. REMARK: Controller Built-in European-English Font

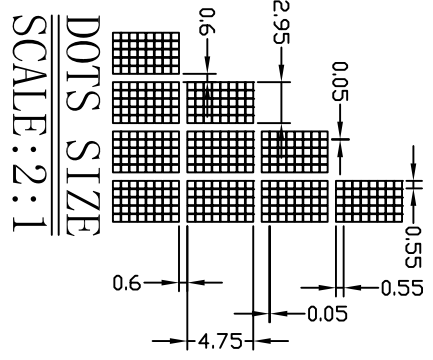

DESCRIPTION:		ThingWell Electronics	
SCALE: 1:1			
SHEET: 1 OF 1			
PROJECTION	LCM NUMBER	W2004C	
UNIT: mm	DRAWING VERSION	V01	
APP:	CHK:	DWN:	
DATE:	DATE:	DATE:	

MECHANICAL TOLERANCE: X.X ±0.3 X.XX ±0.2