
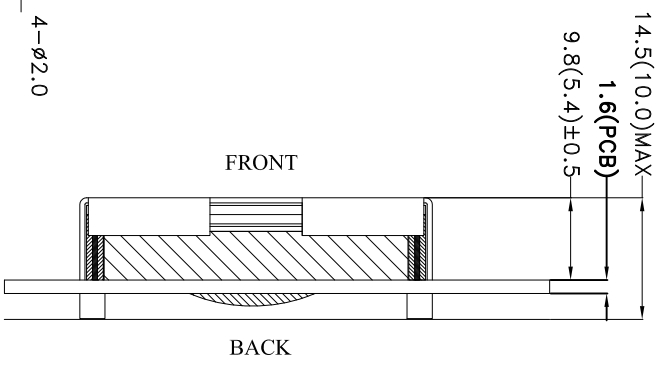


VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.10

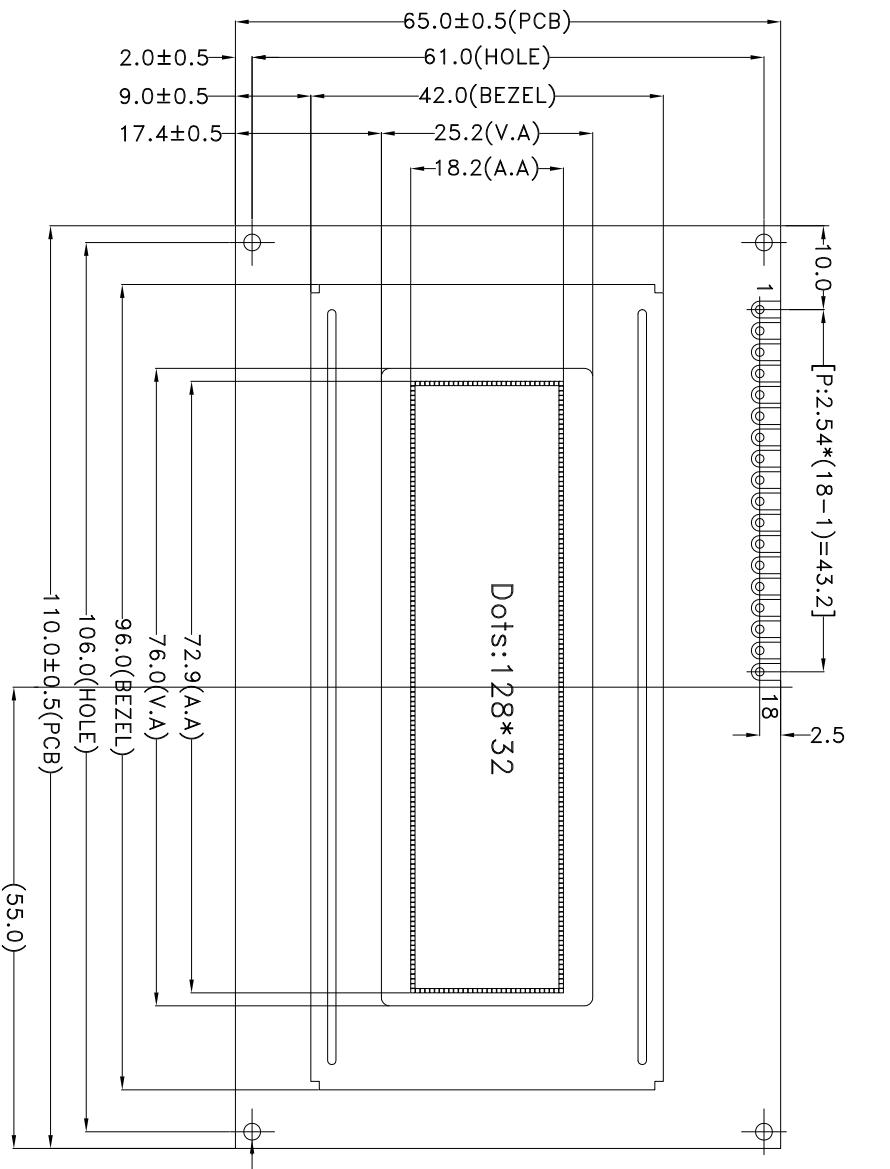


PCB ASSIGNMENT:

1	A	10	/RST
2	K	11	DB0
3	V0	12	DB1
4	VDD	13	DB2
5	VSS	14	DB3
6	E	15	DB4
7	RS	16	DB5
8	R/W	17	DB6
9	CS	18	DB7

SPECIFICATIONS

1. DISPLAY TYPE:STN V/G/STN BLUE /STN,Positive/Negative
2. DISPLAY RESOLUTION:128*32
3. LCD DRIVING VOLTAGE:VDD-19.0V~-VDD+0.3V
4. LOGIC VOLTAGE:5.0 V
5. VIEWING DIRECTION:6 O'CLOCK / 12 O'CLOCK
6. OPERATING TEMP:0°C ~ +60°C
7. STORAGE TEMP:-10°C ~ +60°C
8. LCD CONTROLLER / DRIVER:KS0108B(OR Compatible)
9. DRIVE MODE:1/32 DUTY 1/5 BIAS
10. BACKLIGHT:SIDE LED BACKLIGHT
11. REMARK:

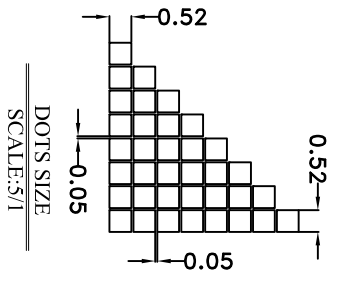

DESCRIPTION:

SCALE: 1:1	ThingWell Electronics			
SHEET: 1 OF 1				
UNIT: mm	PROJECTION	LCM NUMBER	DRAWING VERSION	W12832A
APP:	CHK:	DWN:	V01	
DATE:	DATE:	DATE:		

MECHAICAL TOLERANCE:x.x±0.3,x.xx±0.2