
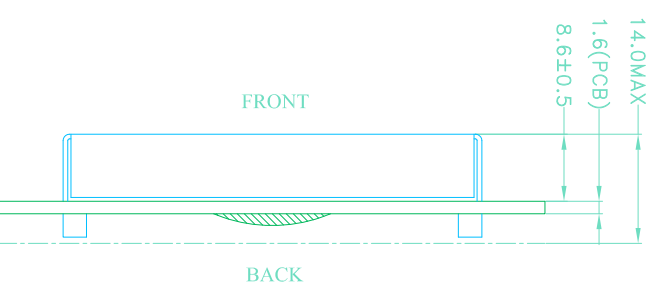


VERSION	CHANGE CONTENT	DATE
V01	FIRST ISSUE	2015.07.10

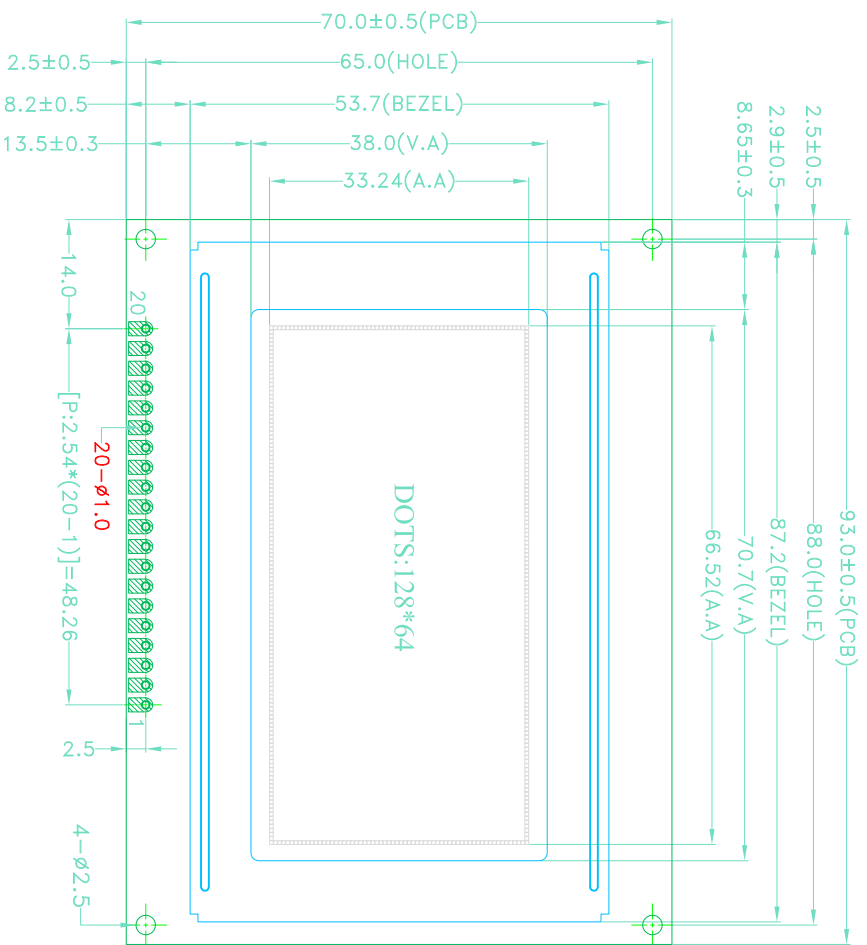


PCB ASSIGNMENT:

1	VSS	11	DB4
2	VDD	12	DB5
3	V0	13	DB6
4	RS	14	DB7
5	R/W	15	CS1
6	E	16	CS2
7	DB0	17	NC
8	DB1	18	VOUT
9	DB2	19	A
10	DB3	20	K

SPECIFICATIONS

1. DISPLAY TYPE:STN Y/G/STN BLUE /FSTN Positive/Negative
2. DISPLAY RESOLUTION:128*64
3. LOD DRIVING VOLTAGE: TBD
4. LOGIC VOLTAGE: 5.0V
5. VIEWING DIRECTION: 6 O'CLOCK
6. OPERATING TEMP.: 0°C -- +50°C
7. STORAGE TEMP.: -10°C -- +60°C
8. LOD CONTROLLER/DRIVE:KS0108BI(Or Compatible)
9. DRIVE MODE: 1/64 DUTY 1/9 BIAS
10. BACKLIGHT: SIDE LED BACKLIGHT
11. REMARK:

MECHANICAL TOLERANCE: x:±0.3, y:±0.2

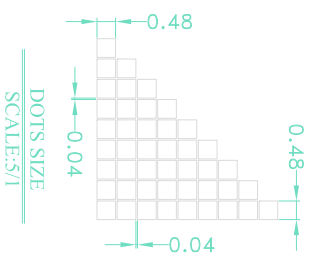

DESCRIPTION:

SCALE: 1:1
SHEET: 1 OF 1

ThingWell Electronics

UNIT: mm	PROJECTION	LCM NUMBER	DRAWING VERSION	W12864B
APP:	CHK:	DATE:	DWN:	V01